NOTES:

- THIS DRAWING DESCRIBES THE FUELAB 496xx SERIES IN-TANK DC BRUSHLESS FUEL PUMP.
- FEATURES INCLUDE:
 - THREE PHASE DC BRUSHLESS MOTOR WITH NEODYMIUM MAGNETS
 EXTERNAL CONTROLLER (ELECTRONICS) REQUIRED

 - IN-TANK OEM STYLE MOUNTING
 - REGENERATIVE TURBINE PUMPING MECHANISM
 - PACKAGED AS KIT, INCLUDING STRAINING FILTER AND PIGTAIL CONNECTOR
 - REFERENCE 253xx SERIES KIT FOR INCLUSION OF CONTROLLER
- **FUEL COMPATIBILITY INCLUDES:**
 - GASOLINE (PUMP OR RACE)
 - METHANOL
 - ETHANOL (INCLUDING E85)
 - DIESEL

UNIQUE SERIAL NUMBER DOES NOT CONTAIN DIRECT INFORMATION IN DETERMINING MODEL NUMBER. CONTACT FUELAB FOR DETERMINATION OF MODEL NUMBER BASED ON SERIAL NUMBER.

- STRAINING FILTER, MATING PIGTAIL ELECTRICAL CONNECTOR, INSTRUCTIONS AND PERFORMANCE CERTIFICATION INCLUDED, BAGGED SERPARATELY FROM PUMP.
- USE OF EXTERNAL MOTOR CONTROLLER IS REQUIRED USING THREE-WIRE PHASE OUTPUT EMPLOYING NON-SENSOR (SENSORLESS) DRIVE TECHNIQUES. COMPATIBLE WITH 720xx SERIES CONTROLLER.
- ALL MODEL 496xx SERIES PUMPS REQUIRE BYPASS REGULATOR OR RELIEF VALVE TO AVOID OVER-PRESSURE OPERATING CONDITION





USE BRUSHLESS PUMPS SUCH AS BMW, AUDI OR LAMBORGHINI.


(UNLESS BEING USED WITH ELECTRONIC PRESSURE CONTROL). SEE TABLE BELOW FOR DETERMINATION OF DESIRED MODEL NUMBER. MODELS 49604 AND 49614 HAS ADDITIONAL 6mm OUTLET FOR USE WITH JET PUMP (EDUCTOR) SYSTEM. BOTH OUTLETS CONTAIN CHECK VALVE. ALL OTHER PUMPS DO NOT HAVE BUILT IN CHECK VALVES. MODEL 49615 HAS INTEGRATED INLET SIPHON FEATURE TO MATCH OE SYSTEMS THAT


MODEL SELECTION TABLE

MODEL	OUTLET TYPE	FLOW RATING, AT 13.8v	MAX. PRESSURE	SPECIAL FEATURES
49601	-6AN	92 GPH AT 45 PSI (350 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	
49602	5/16" SAE	92 GPH AT 45 PSI (350 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	
49603	3/8" SAE	92 GPH AT 45 PSI (350 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	
49604	9mm BARBED	92 GPH AT 45 PSI (350 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	AUX 6mm BARB SIPHON
49611	-6AN	132 GPH AT 45 PSI (500 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	
49612	5/16" SAE	132 GPH AT 45 PSI (500 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	
49613	3/8" SAE	132 GPH AT 45 PSI (500 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	
49614	9mm BARBED	132 GPH AT 45 PSI (500 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	AUX 6mm BARB SIPHON
49615	5/16" SAE	132 GPH AT 45 PSI (500 LPH AT 3.0 BAR)	125 PSI (8.6 BAR)	SIPHON STYLE INLET

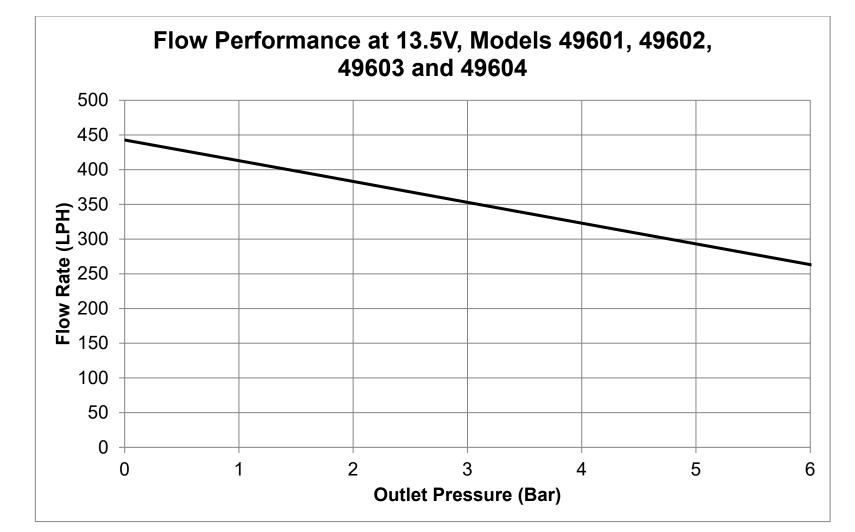

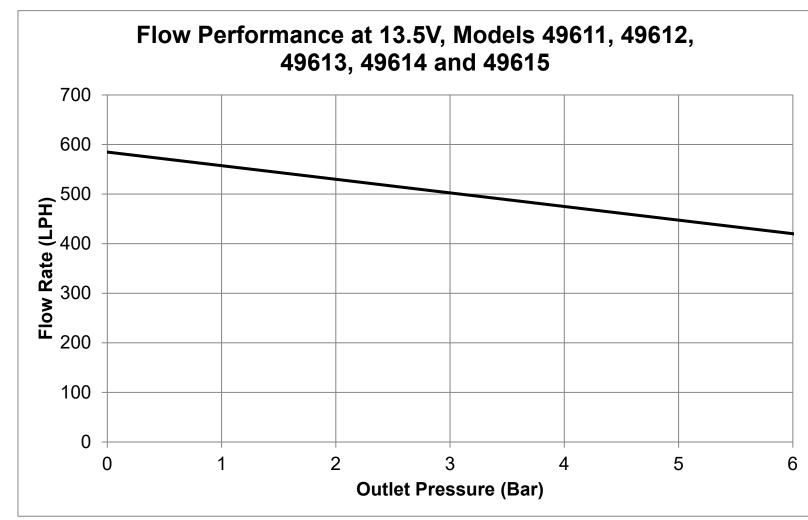

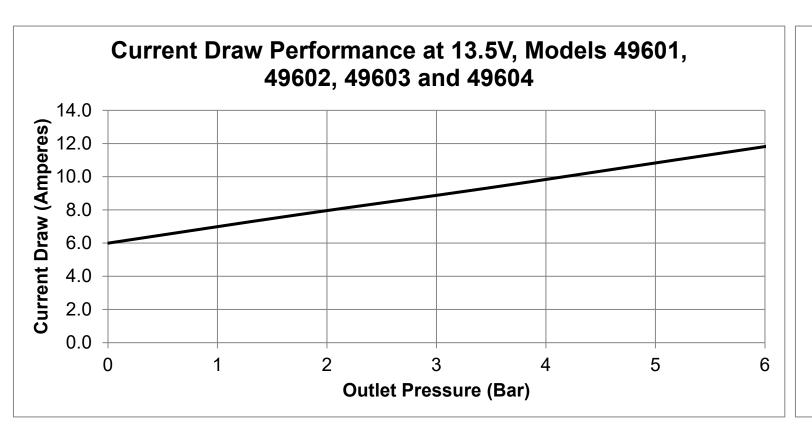

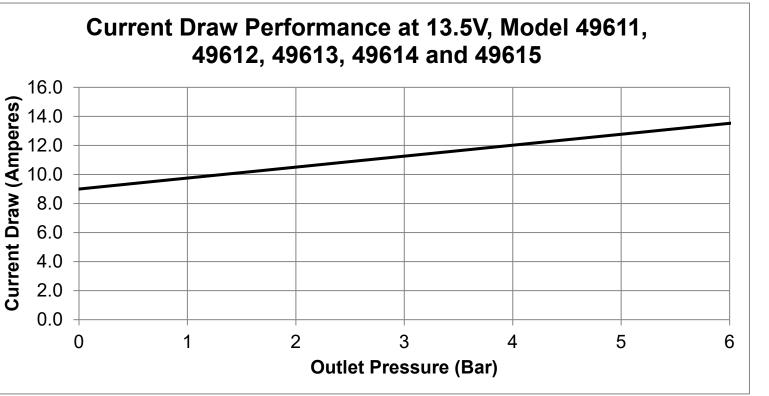

UNLESS OTHERWISE SPECIFIED: FUELAB INTERPRET DWG PER ANSI Y14.5 Collinsville, Illinois ANGULAR: ± 1/2° ELECTRONIC FUEL PUMP, 496xx SERIES DECIMALS:

.X±.1 .XX±.03 .XXX±.010

128

SURFACE FINISH OR BETTER BREAK ALL SHARP EDGES .010 MAX REMOVE ALL BURRS SIZE DWG. NO. REV 110021300 Α SCALE: 1/1 WEIGHT: DO NOT SCALE DRAWING SHEET: 1 OF 6

